

BLGB50 Glazing and Curtain Walling Louvre Panels

Aluminium extrusions type 6063-T6 to BS1474 having a minimum thickness of 1.6mm. Mitred frame joints TIG welded for additional strength.

The louvre comprises louvre blades inclined at 45° and mounted at 50mm pitch within 50mm deep frame. Galvanised bird screen supplied as standard. Frames are provided with a 24mm or 28mm glazing edge to the perimeter for insertion into standard curtain walling or glazing systems. The bottom blade is extended over the outer frame to prevent ingress of water and provide drainage from the louvre face.

Louvre blades secured by a minimum of four no.8 x 19 screws per blade to provide robust assembly. BL50/75 and BL50/100 systems include extruded aluminium channel mullion to rear to further increase strength.

Louvre sizes made to suit customer requirements.

Recommended maximum size for a single unit: 1000 x 2000 for 50mm deep system. Upto 2000 x 2000 for the 75mm and 100mm deep systems. Larger sizes accommodated in multi-panel systems.

Nominal free area: 50%

Maximum BSRIA weather test rating (simulated rainfall of 75mm/hr; wind speed of 13m/sec): 89.42% Class C.

Face Velocity (metres per second)	0.5	1.0	1.5	2.0
Pressure drop (Pascals)	2.48	9.91	22.3	39.65





BRIDGE LOUVRE

COMPANY
LIMITED

BL GB50 Series

a total **louvre design**
and **manufacturing service**

Fixing

Fixes directly into curtain walling glazing system in place of glass.

Options

- Insect Screen
- Blanking Panels (single skin plate or insulated blanking panel)
- Vermin Guard
- Removable core/hinged core

Finish

- Mill finish as standard (untreated and unpolished aluminium)
- Polyester Powder coatings to any standard RAL or BS 4800 range colours
- Special finishes available on request

Orders/Enquiries

Identify your requirements using our product codes as follows:

BLGB – all products, **50** – blade pitch, **24** or **28mm** – glazing, **P** – powder coated (confirm colour reference separately where known), **M** – mill finish, **IM** – insect mesh (bird guard is Included as standard)

Example:

BLGB50/28P-IM (BLGB50 series louvre in 28mm glazing, polyester powder finish with insect mesh).







BRIDGE
LOUVRE


COMPANY
LIMITED

BL GB50 Series

a total **louvre design**
and **manufacturing service**

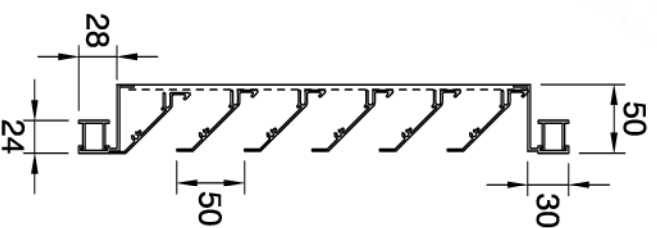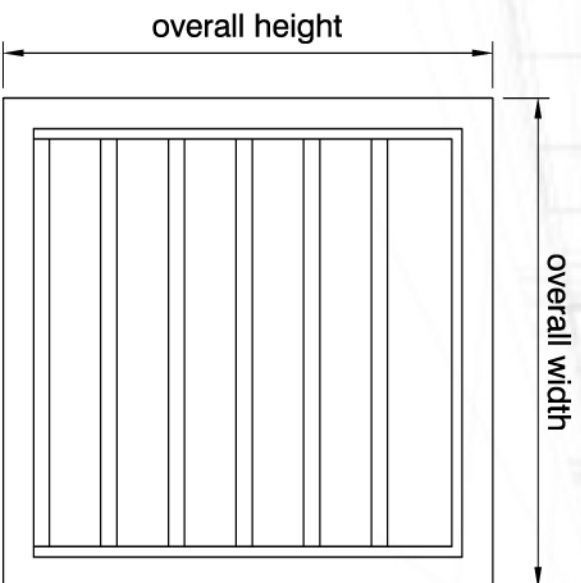

BLG50-24

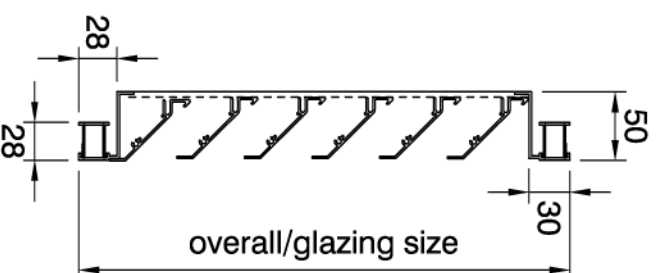

BLG50-28